BILANCIAI GROUP

Thermal printer



STB 2080 model

MADE IN ITALY

CE


STB 2080 thermal printer

Technical features

- Printing technology: thermal printing
- Number of dots: 8 dots / mm
- Print speed: 250 mm/sec
- Character set: PC437, PC850, PC860, PC863, PC865, PC858 (Euro)
- Number of columns: 35, 45, 64
- Supported barcodes: UPCA, UPCE, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, QR code
- Paper width: 80mm / 82.5mm
- Paper Basis Weight: from 58 to 90 g/ m2
- Paper thickness: 63 µm
- Roll diameter: max Ø 90 mm
- Sensors: Head temperature, Paper presence, Black alignment notch detector, Open cover
- Interfaces: USB 1.1 full speed + Serial RS232
- Power supply: 24 Vdc ± 10% (external power supply unit)
- Frequency: From 47 Hz to 63 Hz
- Power: 60 W
- Operating temperature: from 0°C to 50°C
- Average power consumption: 1.5 A (50% printing rate), 1 A (12.5% printing rate)
- MCBF: 1 million cuts, total or partial cut
- Safety: EN60950 2001
- Marks: CE, RoHS Compliant
- Dimensions: 209x152x140 mm (LxHxW)
- Weight: 2.3 kg
- Printhead life: 200 km (12.5% duty cycle)



Printing examples

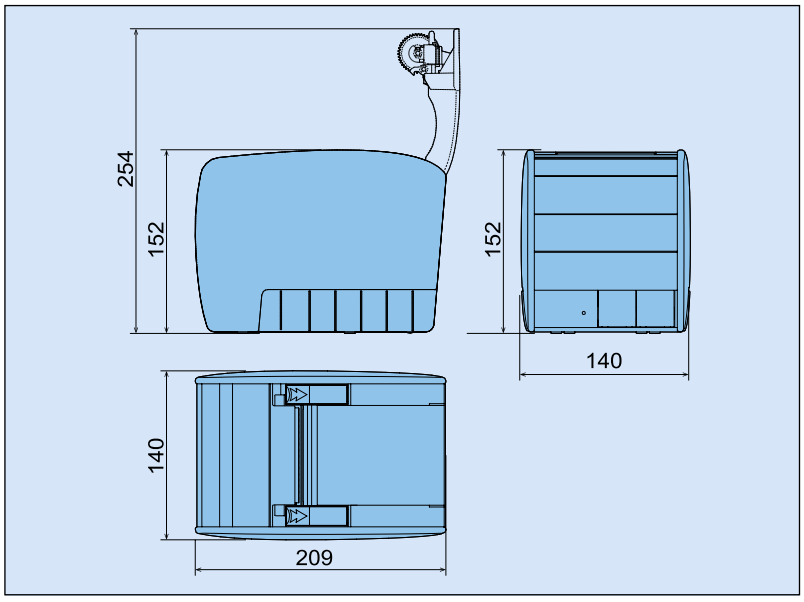

General characteristics

- Thermal printer for an excellent print quality, even in graphics and, at the same time, lower consumption
- Elegant design, designed for every type of environments
- Printing on 80mm wide thermal paper, with front receipt output
- Serial interface RS232
- Auto-cutter 1Ml cuts
- Blinking coloured LED button
- Size: 140mm (L) x150mm (W) x117mm (H)

SOCIETA' COOPERATIVA BILANCIAI
Weighing instruments and Technology

Società Cooperativa Bilanciai Campogalliano
41011 Campogalliano (MO) Italy - Via S. Ferrari, 16
Tel. +39 059 / 89.36.11 - Fax +39 059 / 52.70.79
www.coopbilanciai.it - cb@coopbilanciai.it

Agent / Dealer

In line with our aim of continuous product improvement, we reserve the right to make modifications at any time and without prior notice to the products as illustrated in the above photographs - N. 81190515 - 2091 - *netstudio*